




Setup Instruction

Revolutionary Comfort

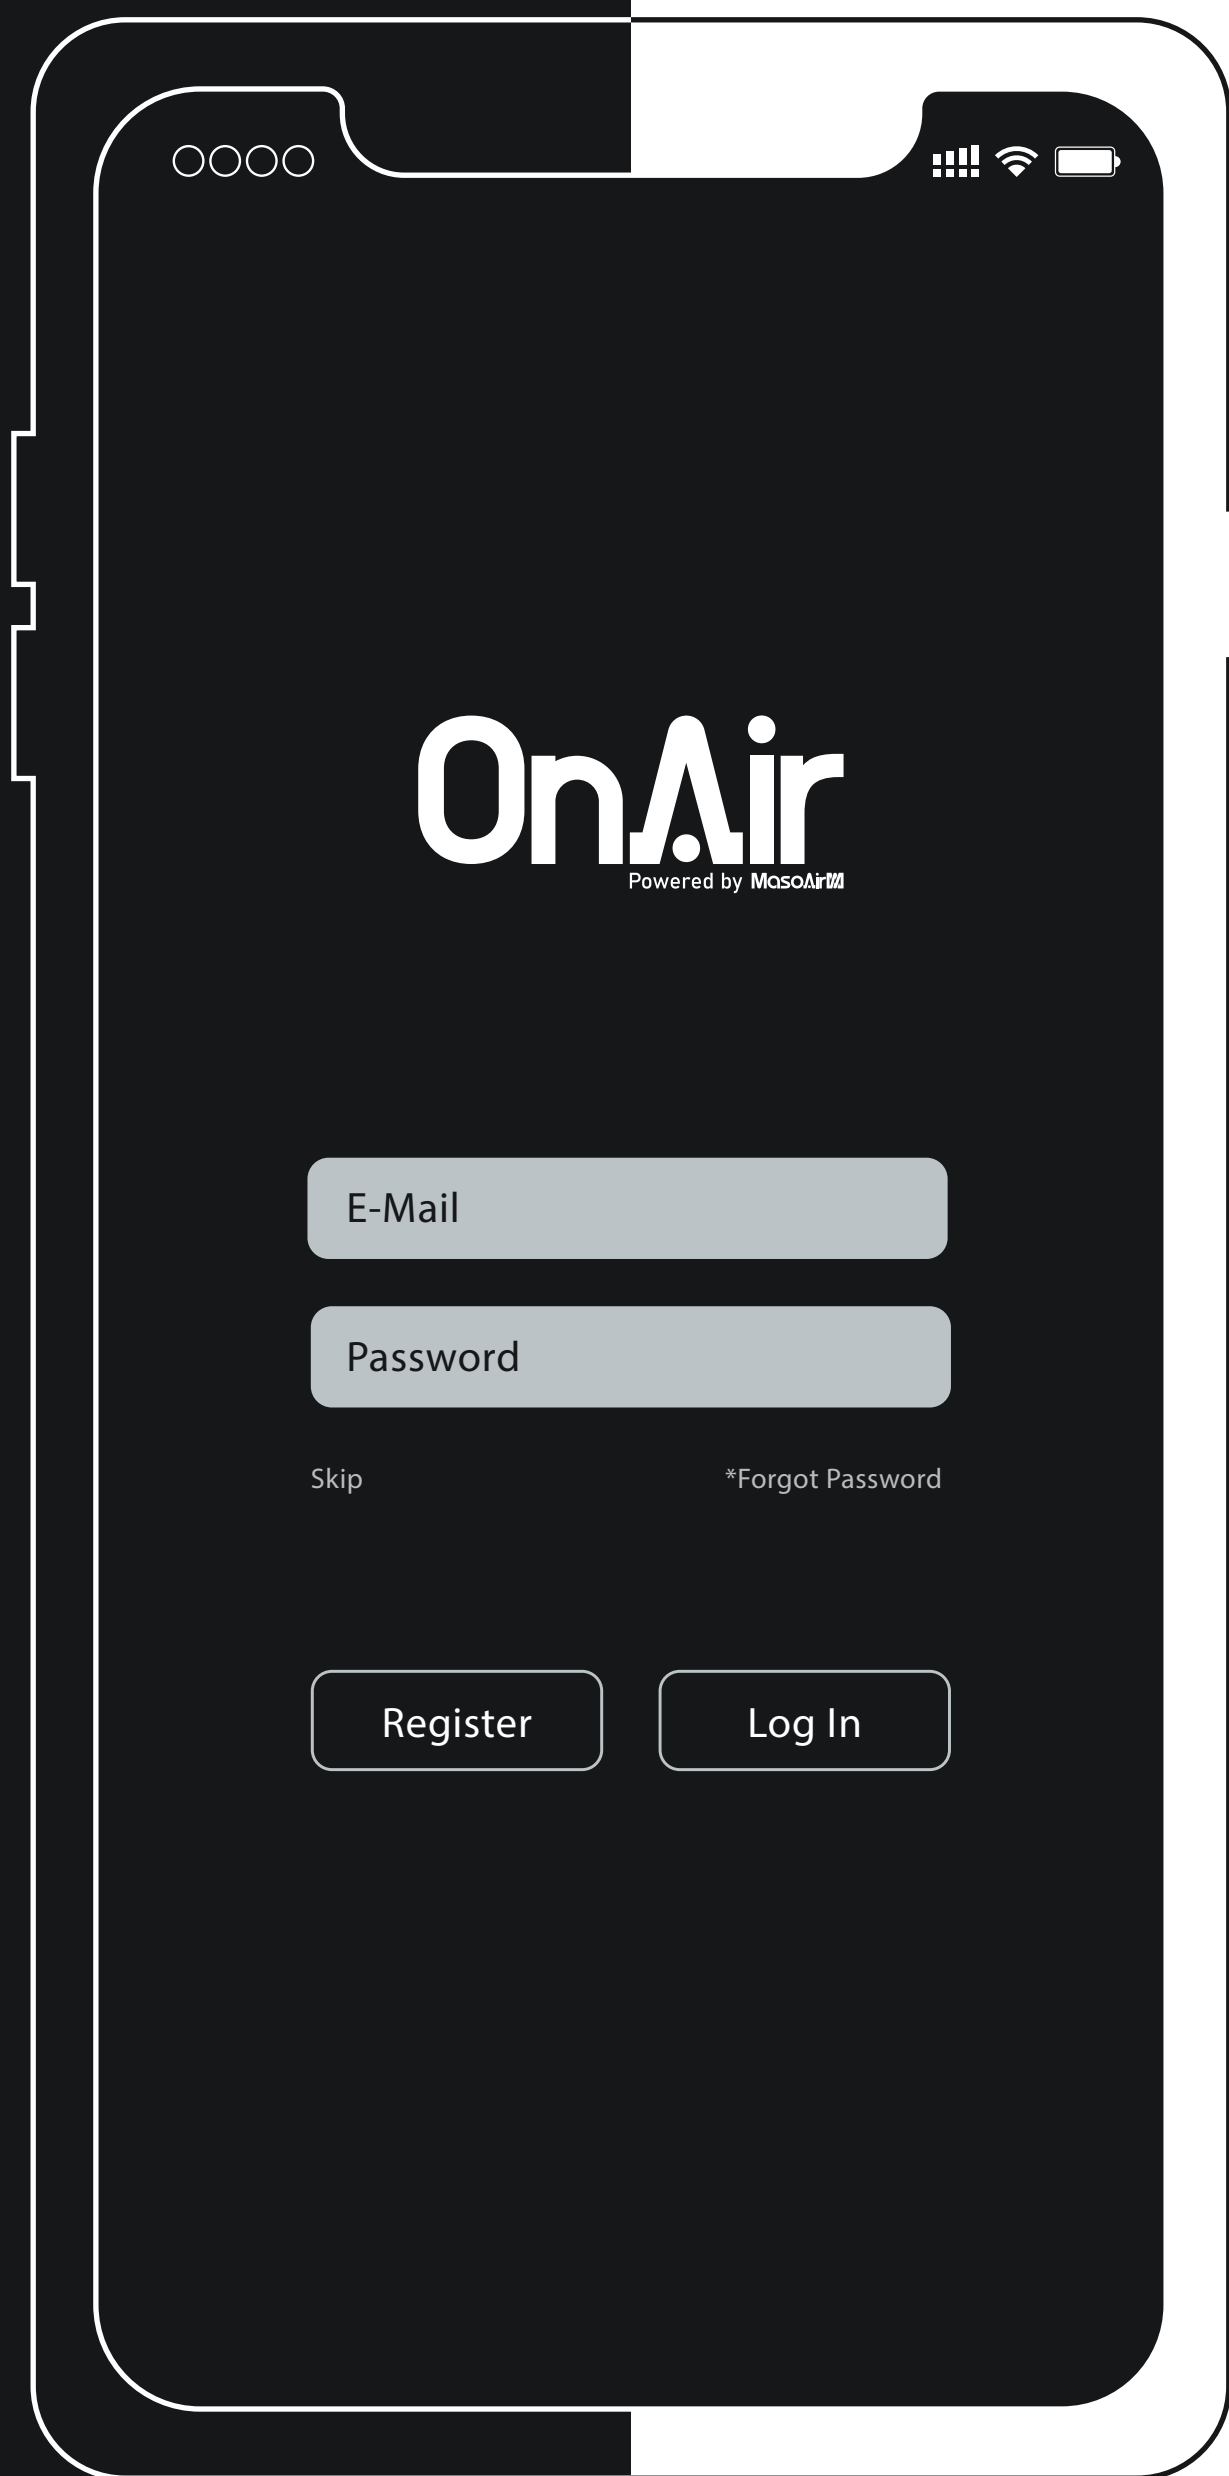


Register New Account

Log in Existing

Skip to view APP

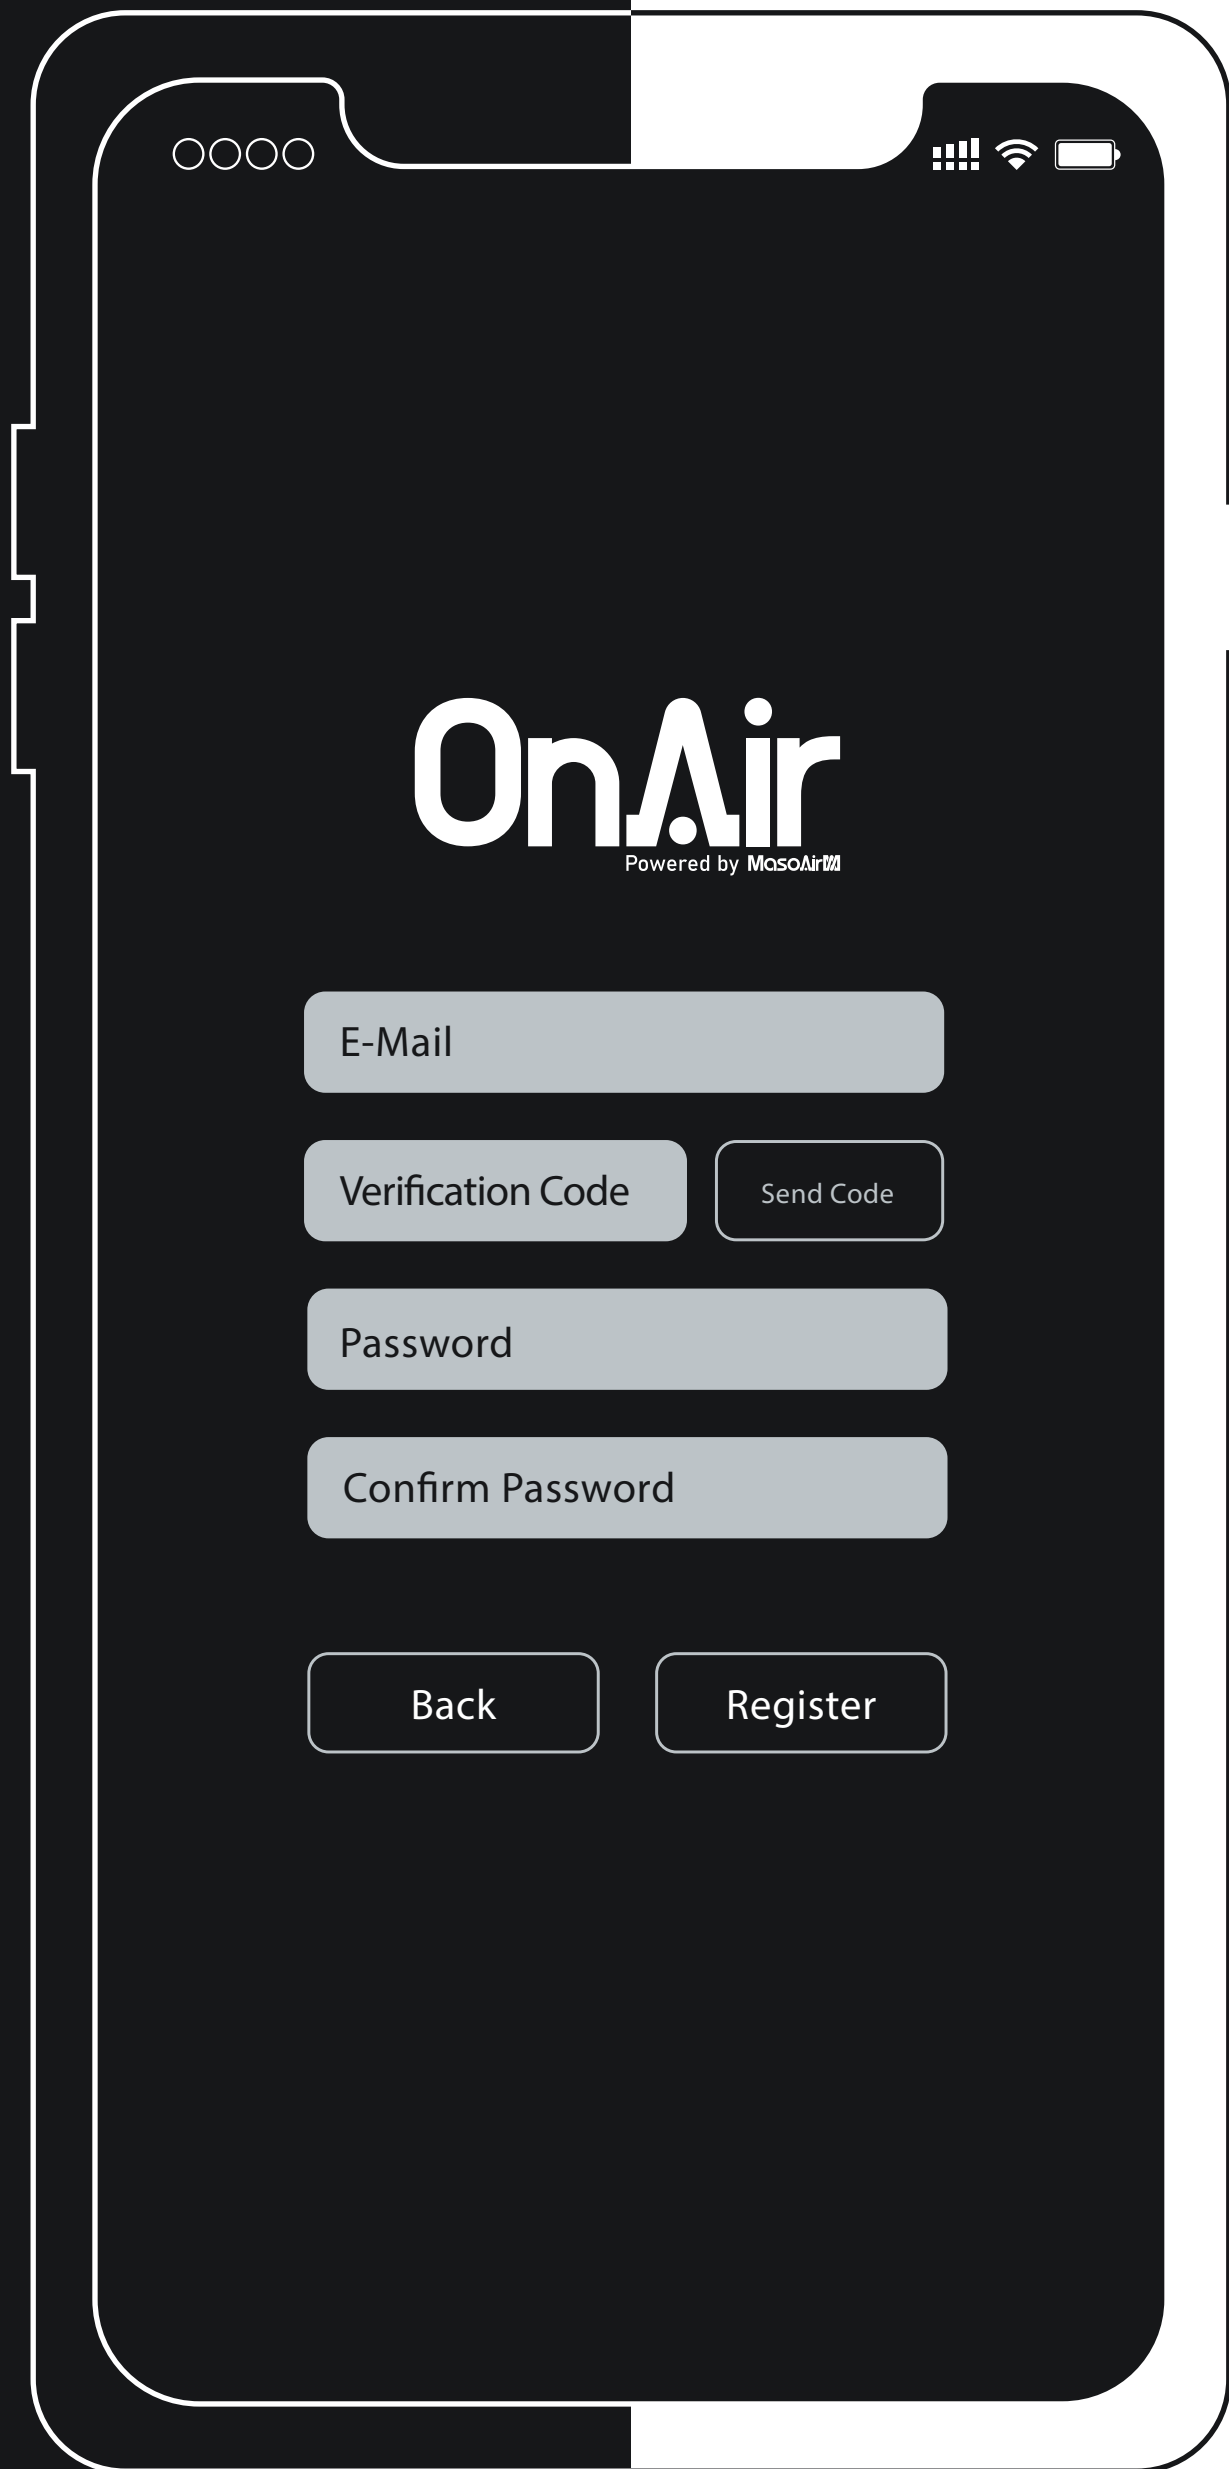

A mobile application interface for account registration. The screen has a dark background with white text and light gray input fields. At the top, there are status bar icons (signal, Wi-Fi, battery) and four dots. The OnAir logo is centered. Below it are four input fields: E-Mail, Verification Code, Password, and Confirm Password. The Verification Code field is accompanied by a 'Send Code' button. At the bottom are 'Back' and 'Register' buttons.

○○○○

OnAir
Powered by MasoAir™

E-Mail


Verification Code [Send Code](#)

Password

Confirm Password

[Back](#) [Register](#)

Register Account E-Mail and Password

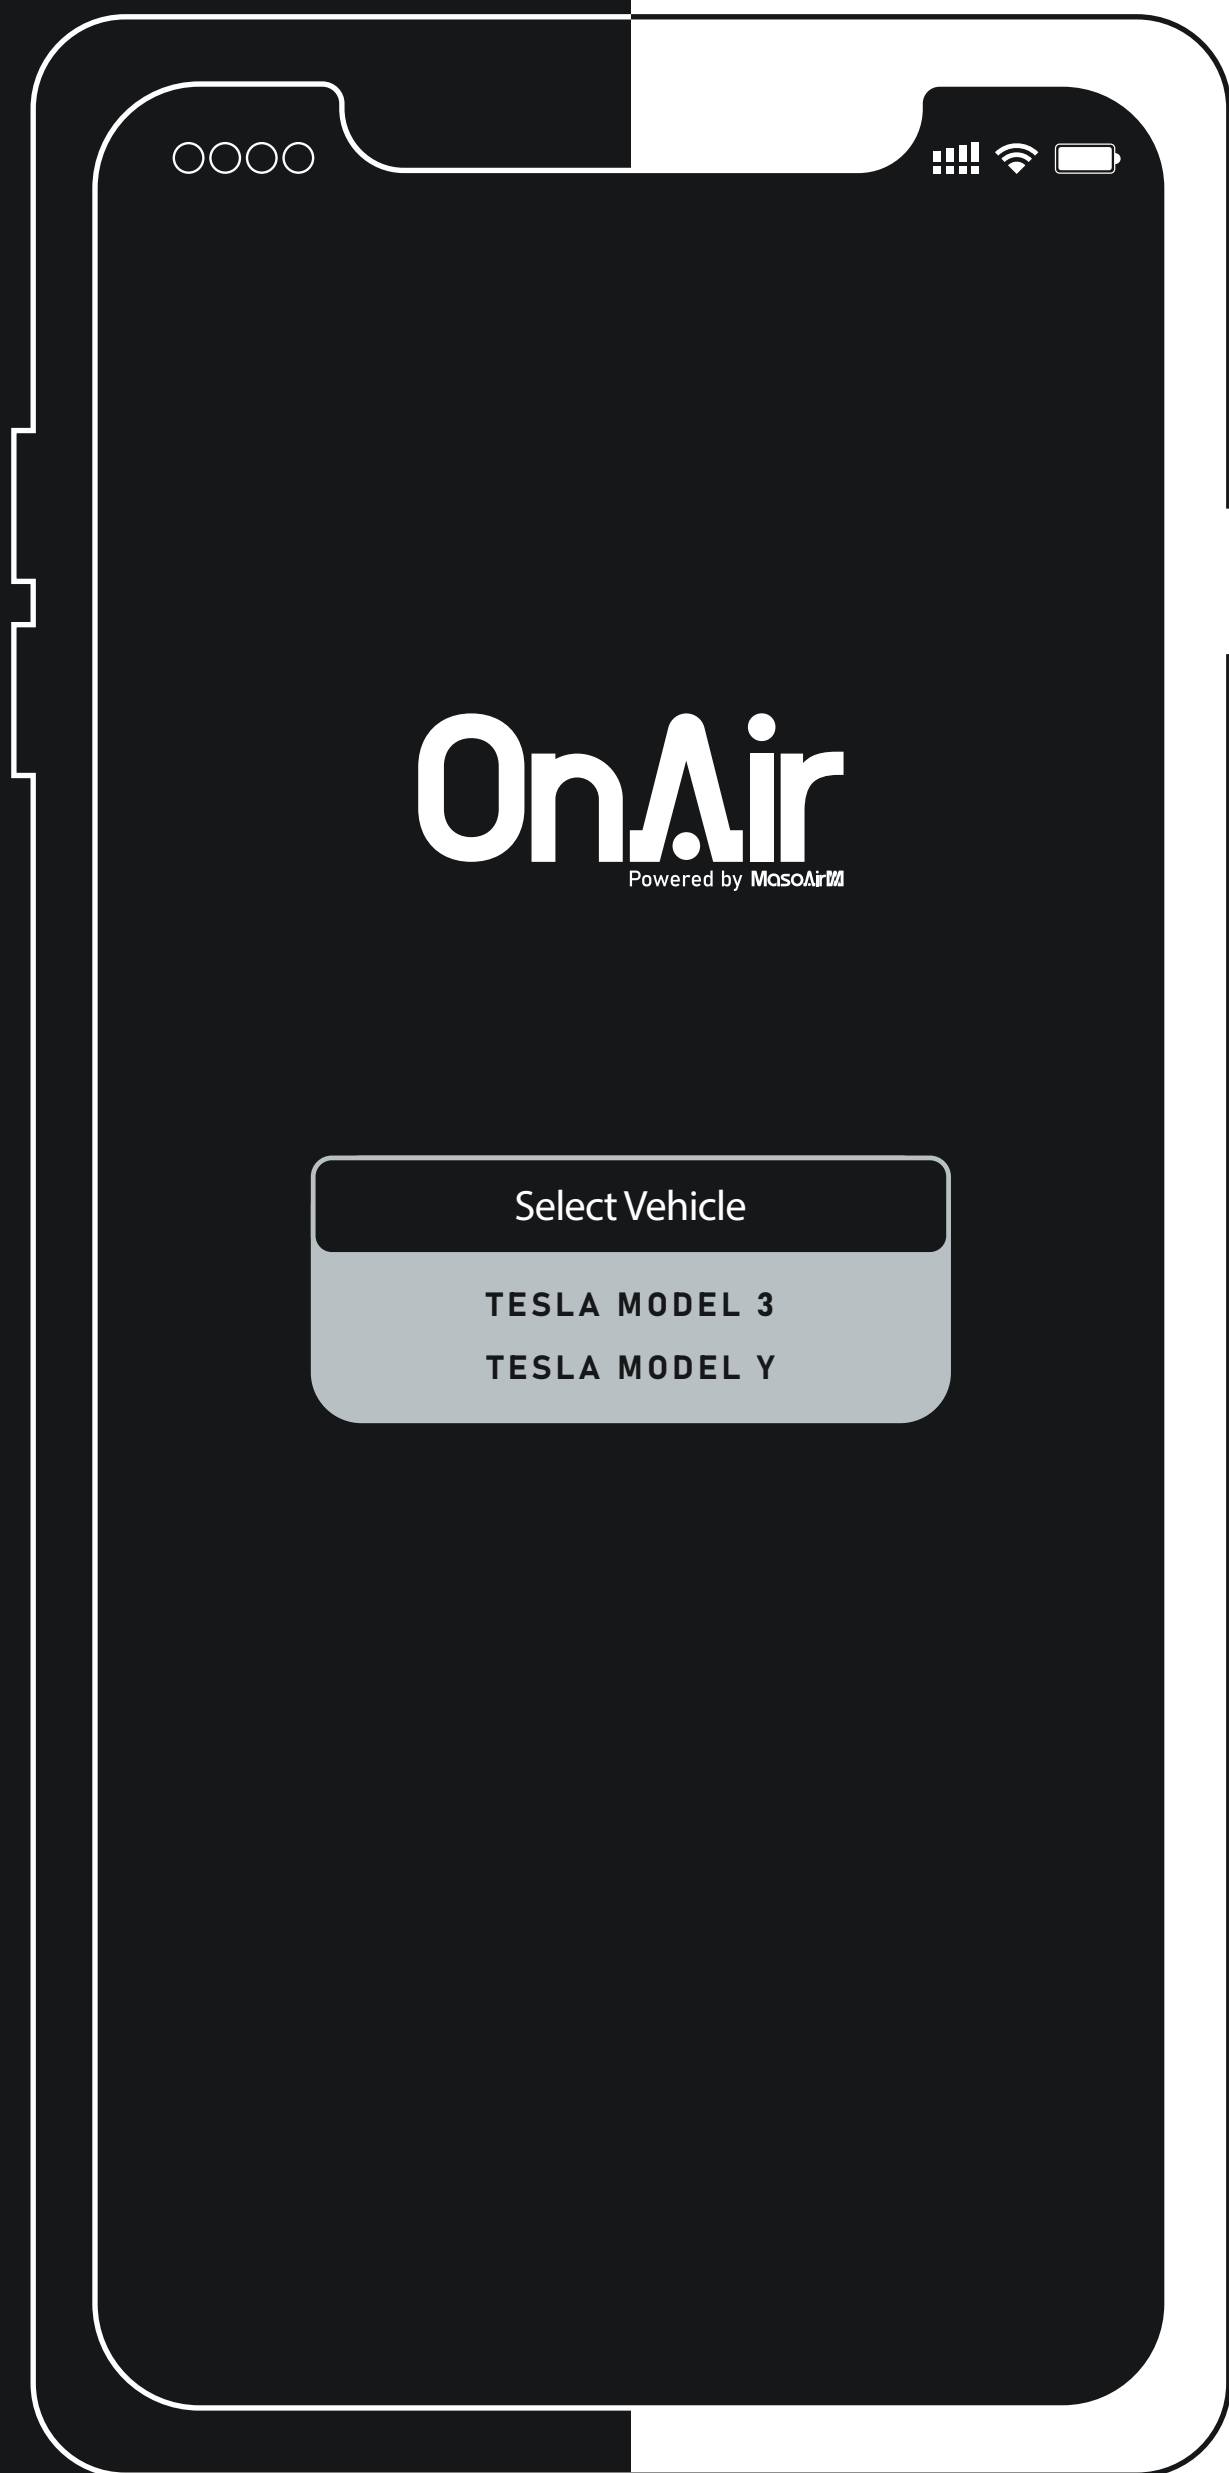

Select Vehicle Model



Menu



Bluetooth

Bluetooth ON when connected
Click to enter BT Setting



Vehicle Selection

Reset to change vehicle



TESLA
MODEL 3



Vehicle Height Preset

Low
OnAir - Recommended
High



Malfunction Notification

Click for Details



Auto

Self Leveling Function
Default to OnAir Height




ALL DOWN

Hold for 5 seconds
Optional Add On



Low Setting should only used in smooth road surface, not recommended to drive on this setting for long period of time.
OnAir setting is most comfortable, balance and recommended for normal usage.
High Setting is more stiff, should only use for going over bumps, do not recommend to drive long period of time, will cause extra wear and tear for the airbag, which will not be covered under warranty.

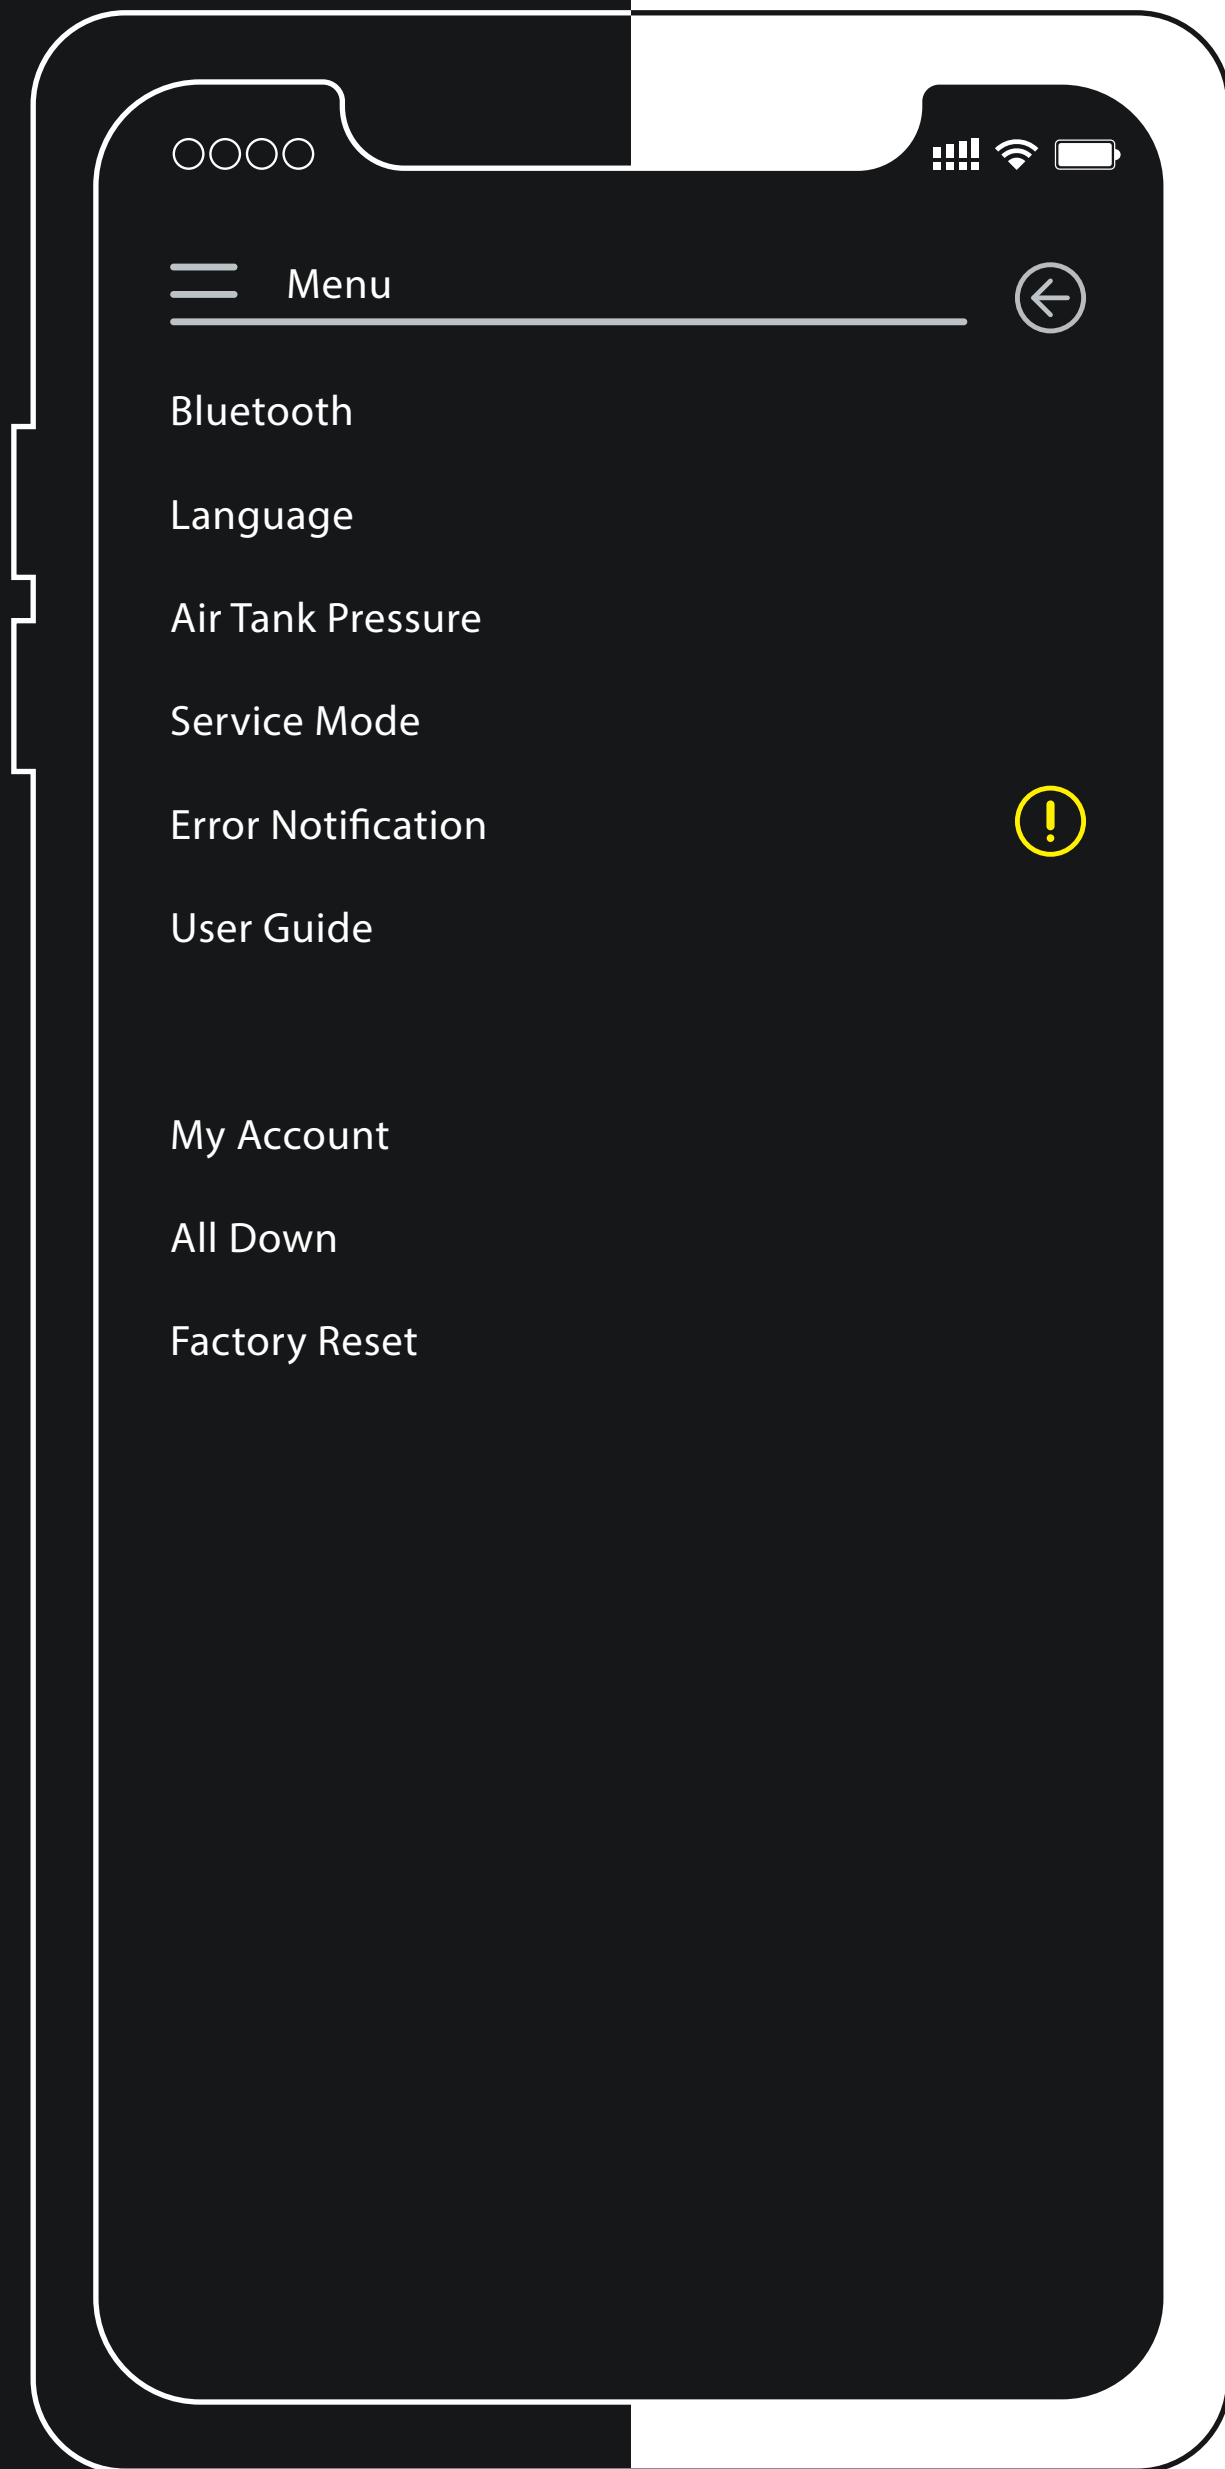

Menu


Yellow Warning Light ON when Error occurs



Bluetooth

Select device you would like to pair


Name may be changed after connection
is established

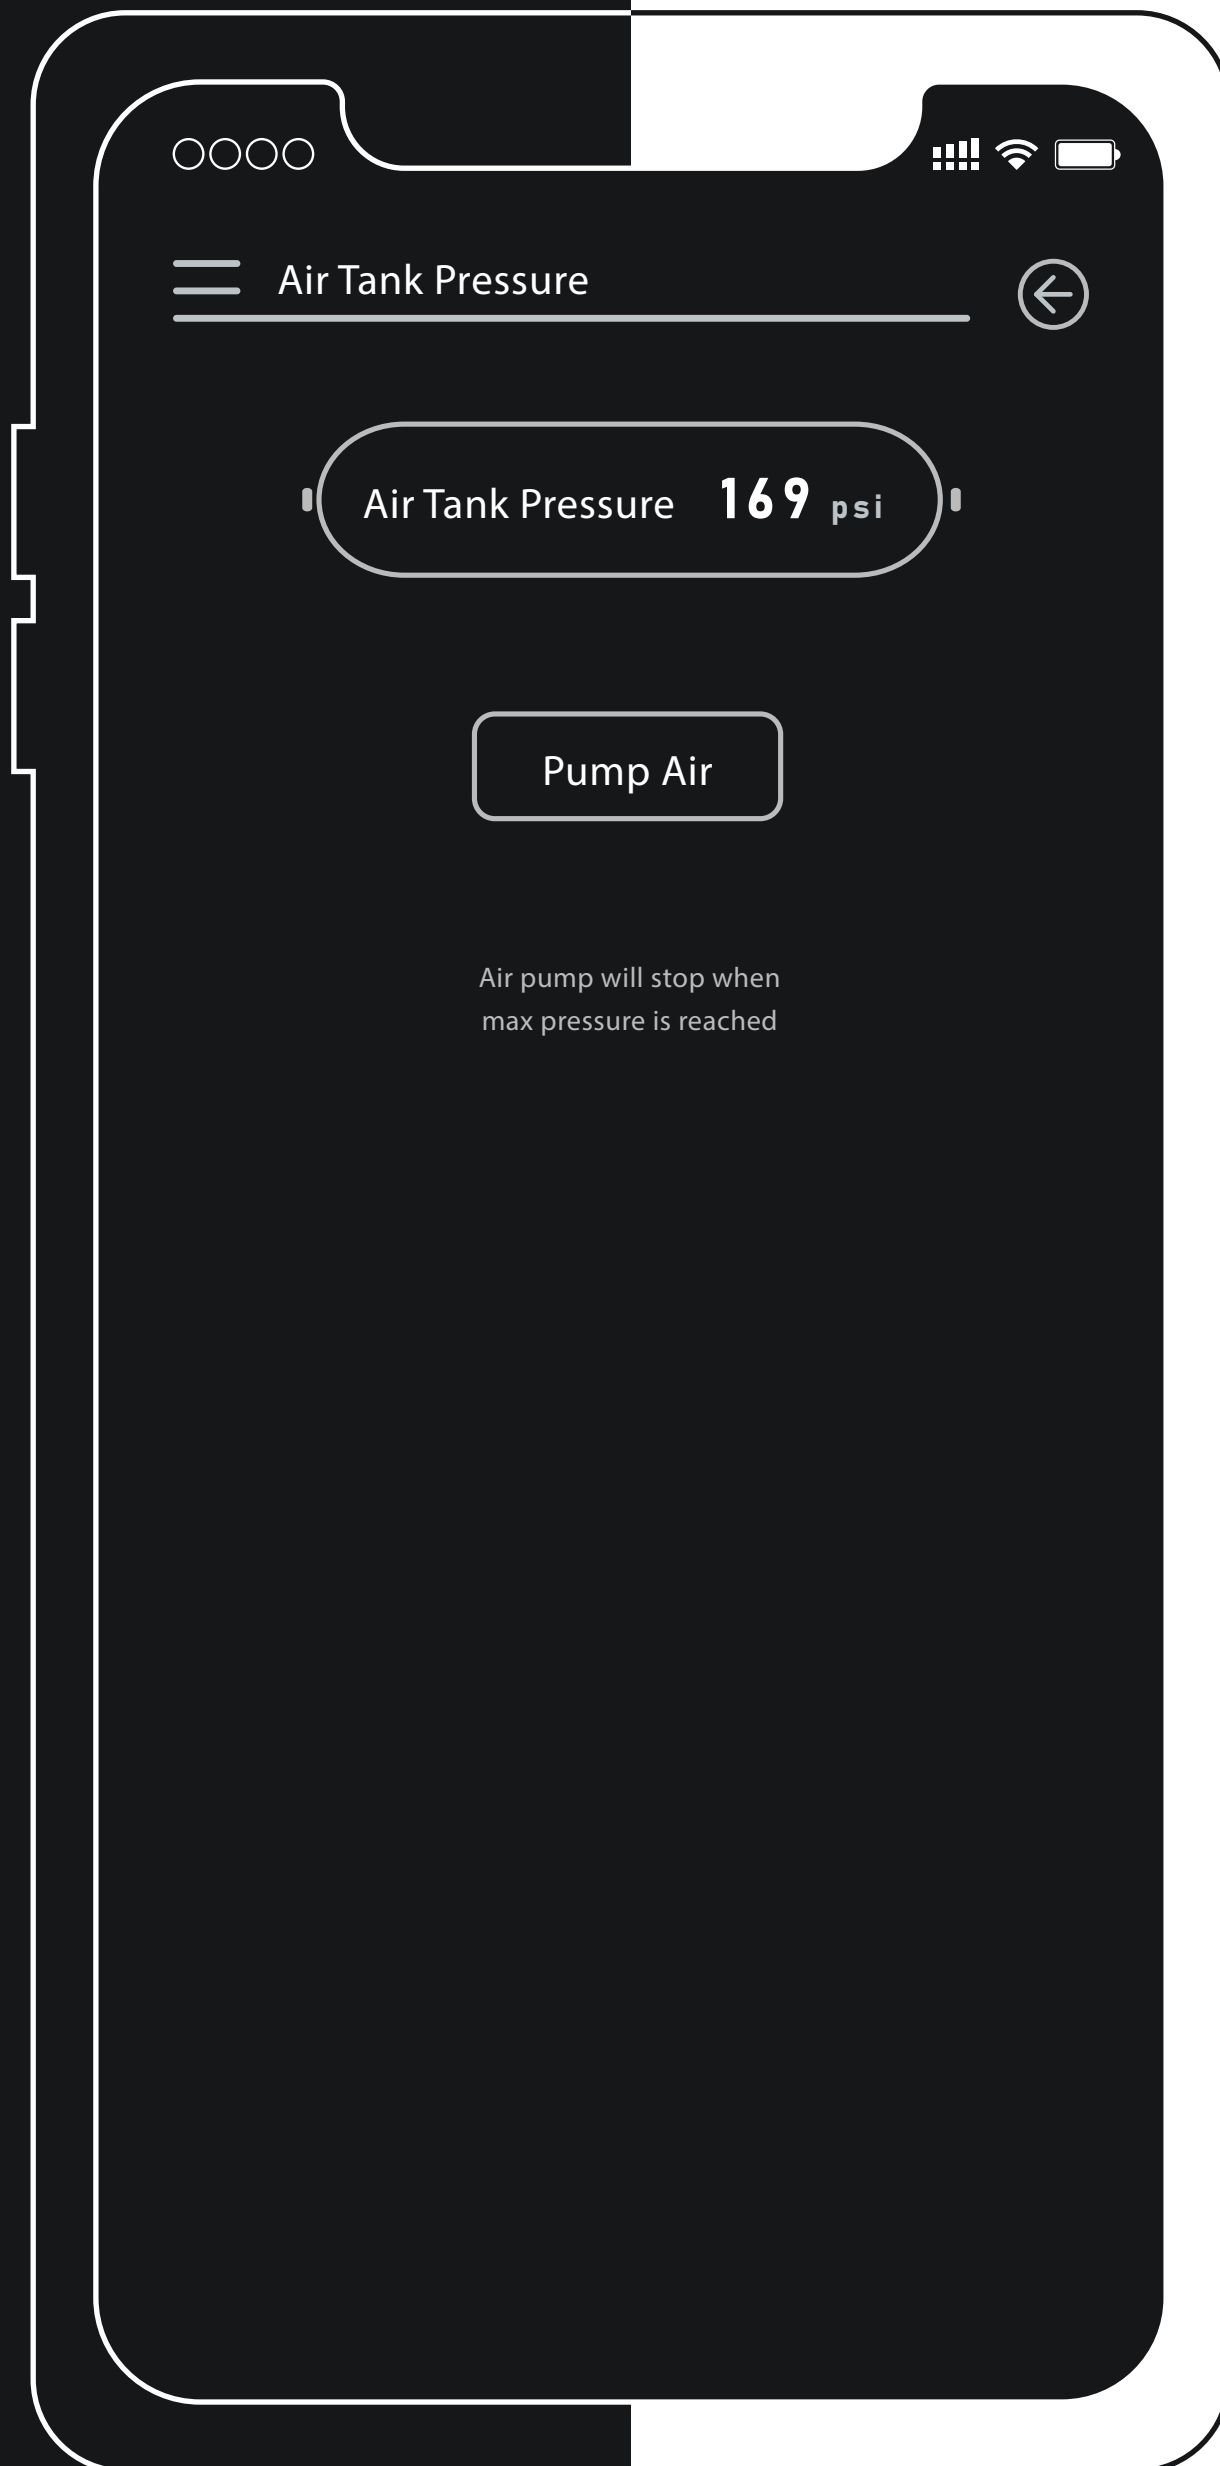

Air Tank Pressure


Displays current Air tank Pressure

Air pump will turn on automatically when pressure is low. Manual Pump to manually add air, pump will stop when max pressure is reached

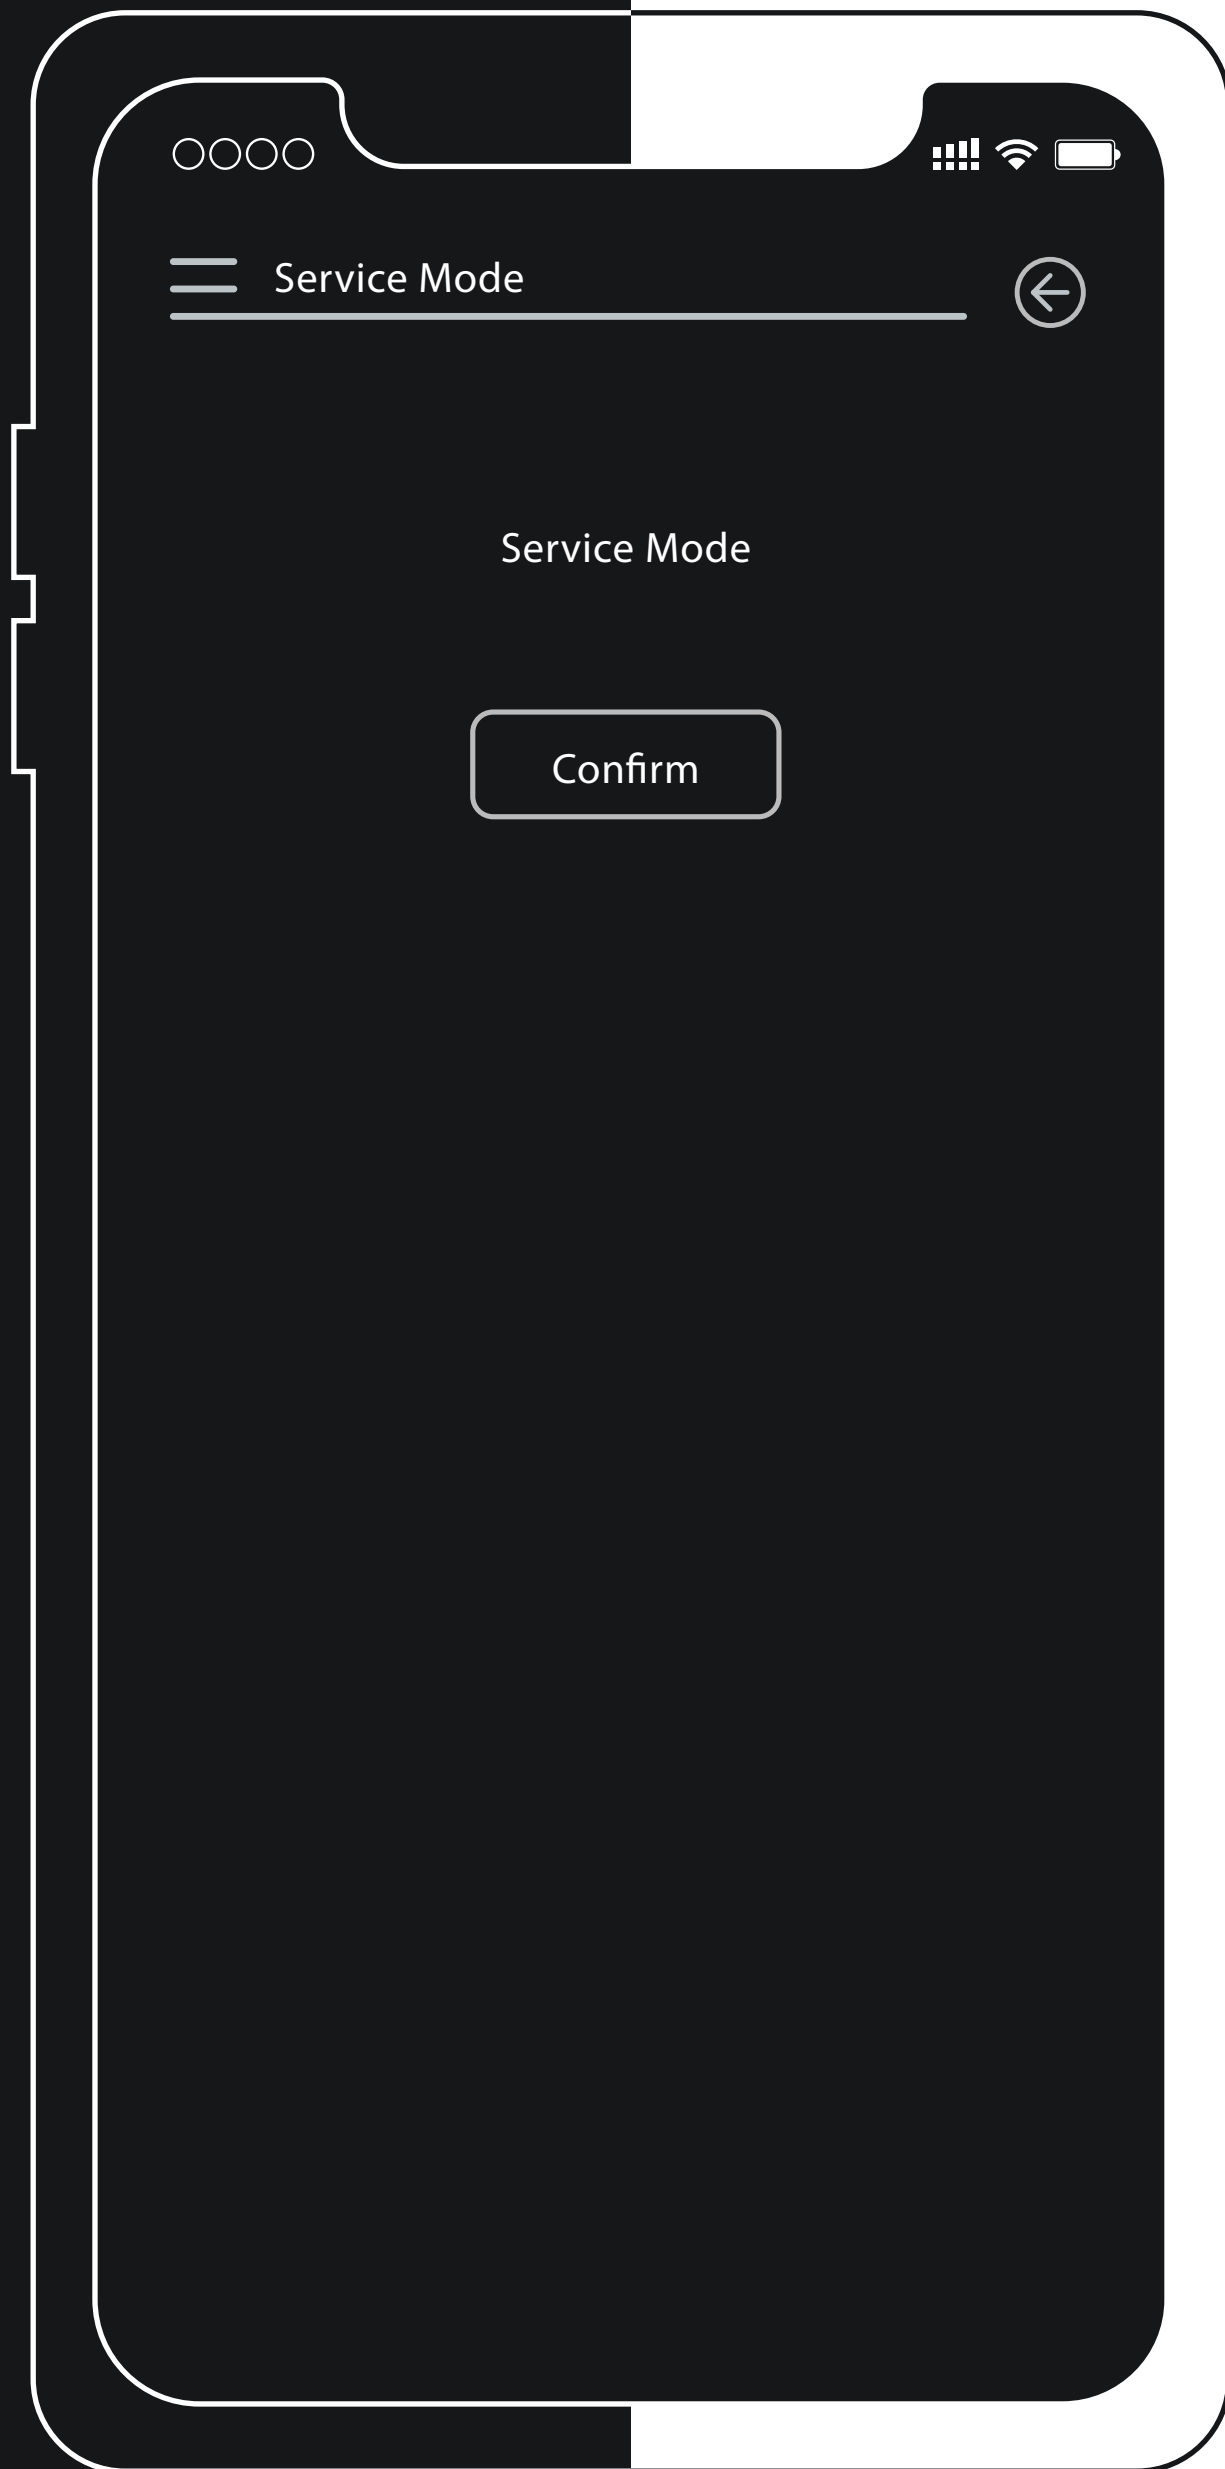


Service Mode

Service mode will disengage all AUTO functions
DO NOT ADJUST VEHICLE HEIGHT while in
Service mode

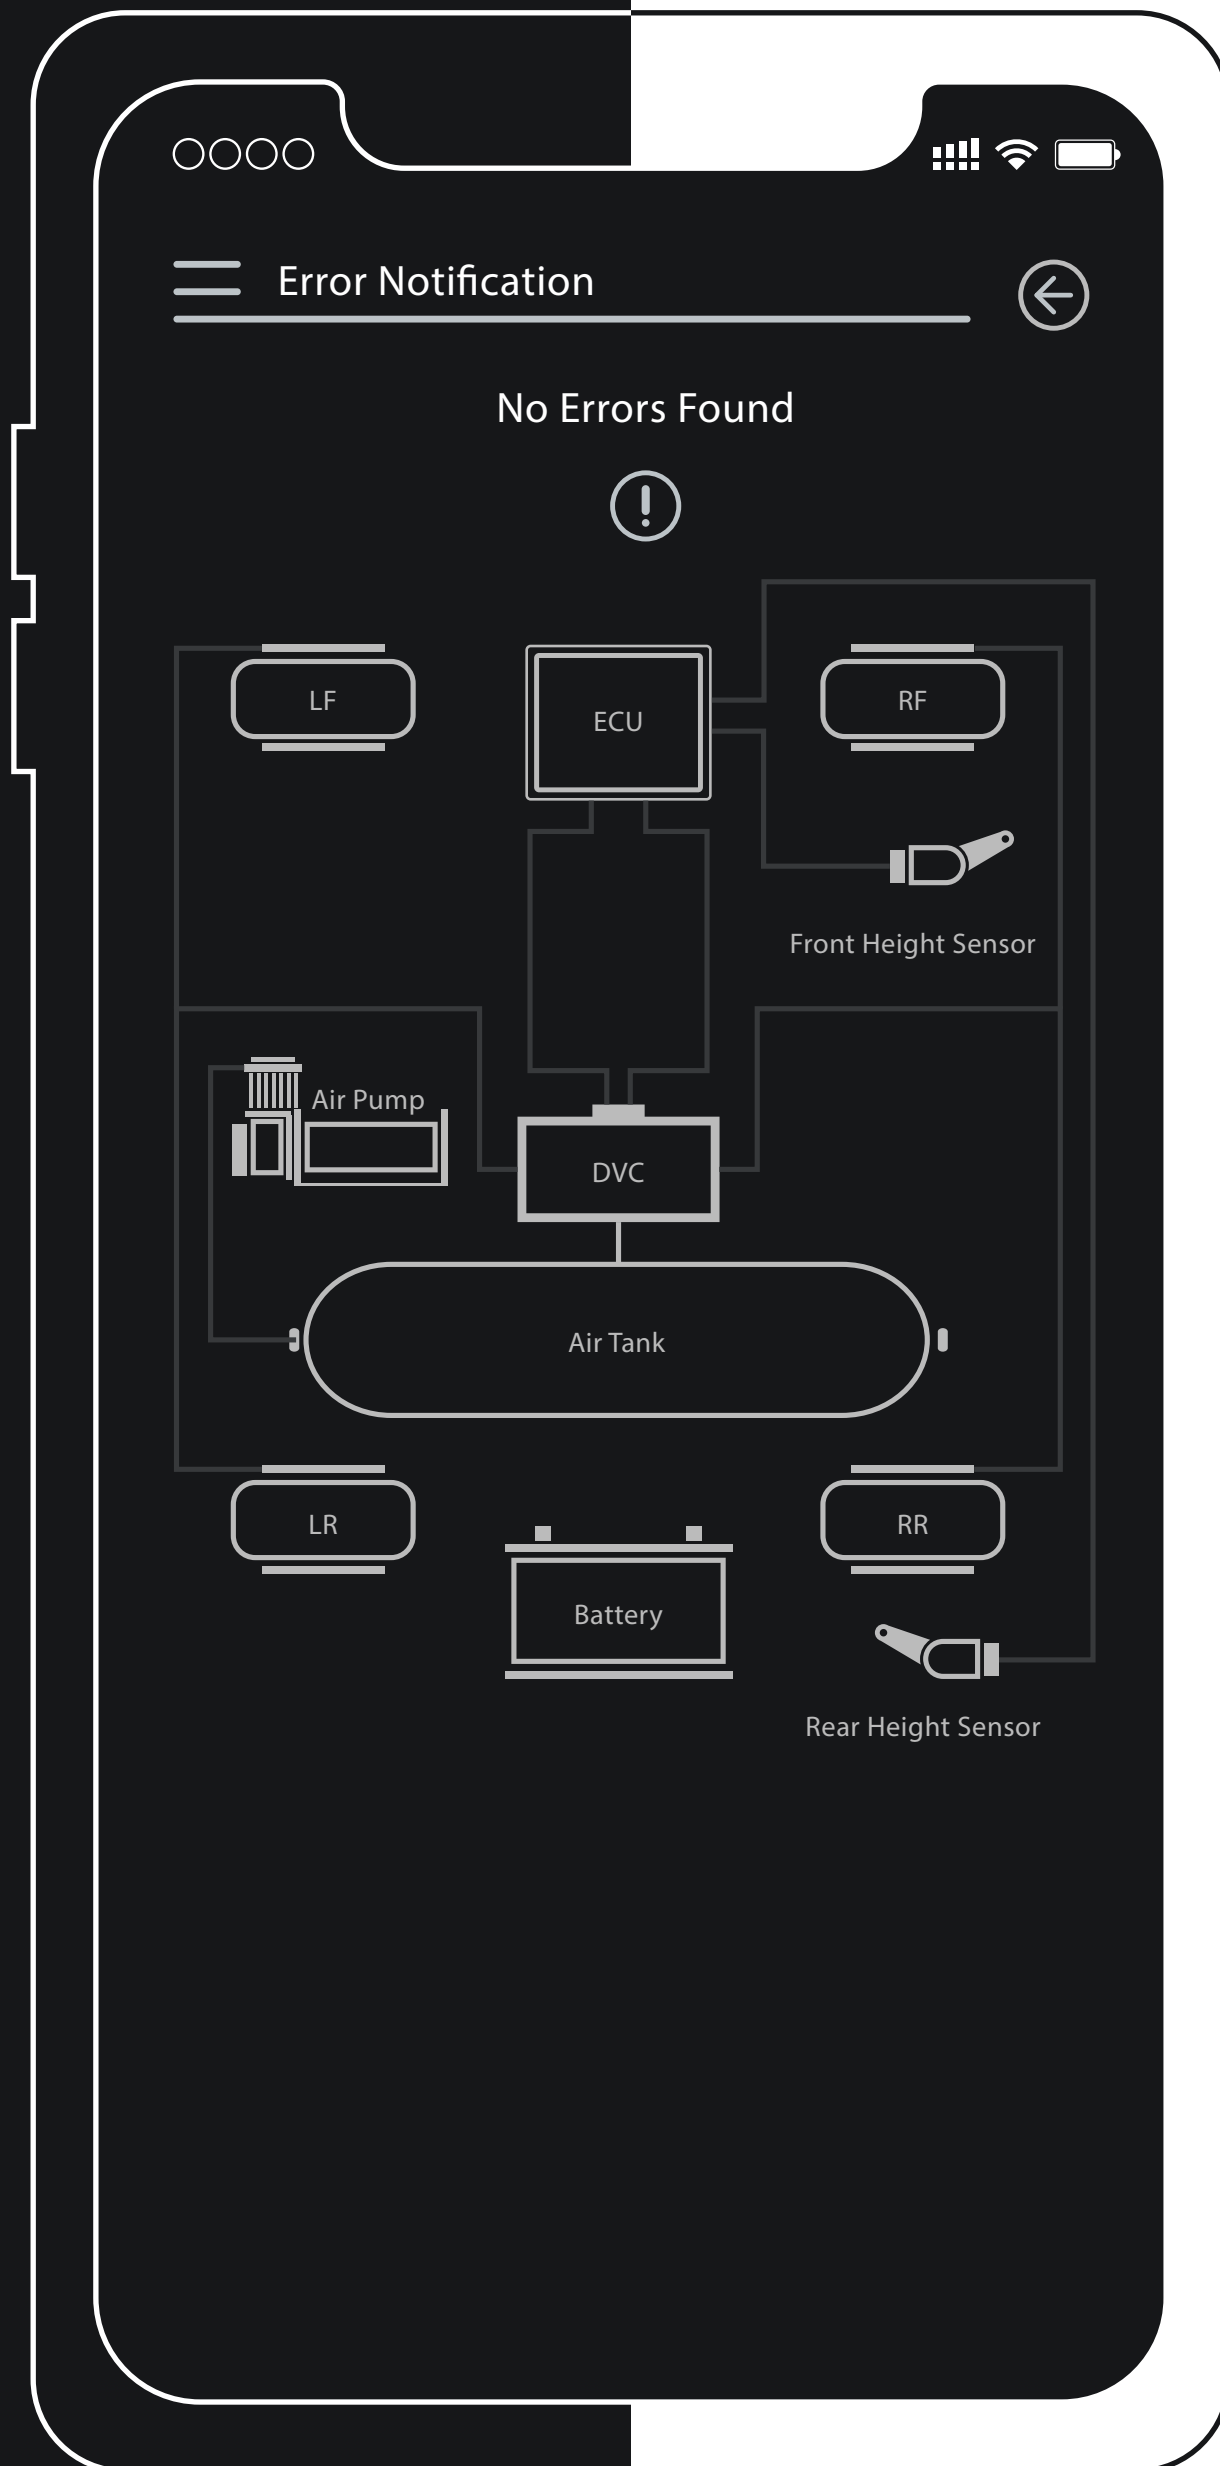

Error Notification

When error occurs,
yellow warning light will illuminate the
malfunctioning component

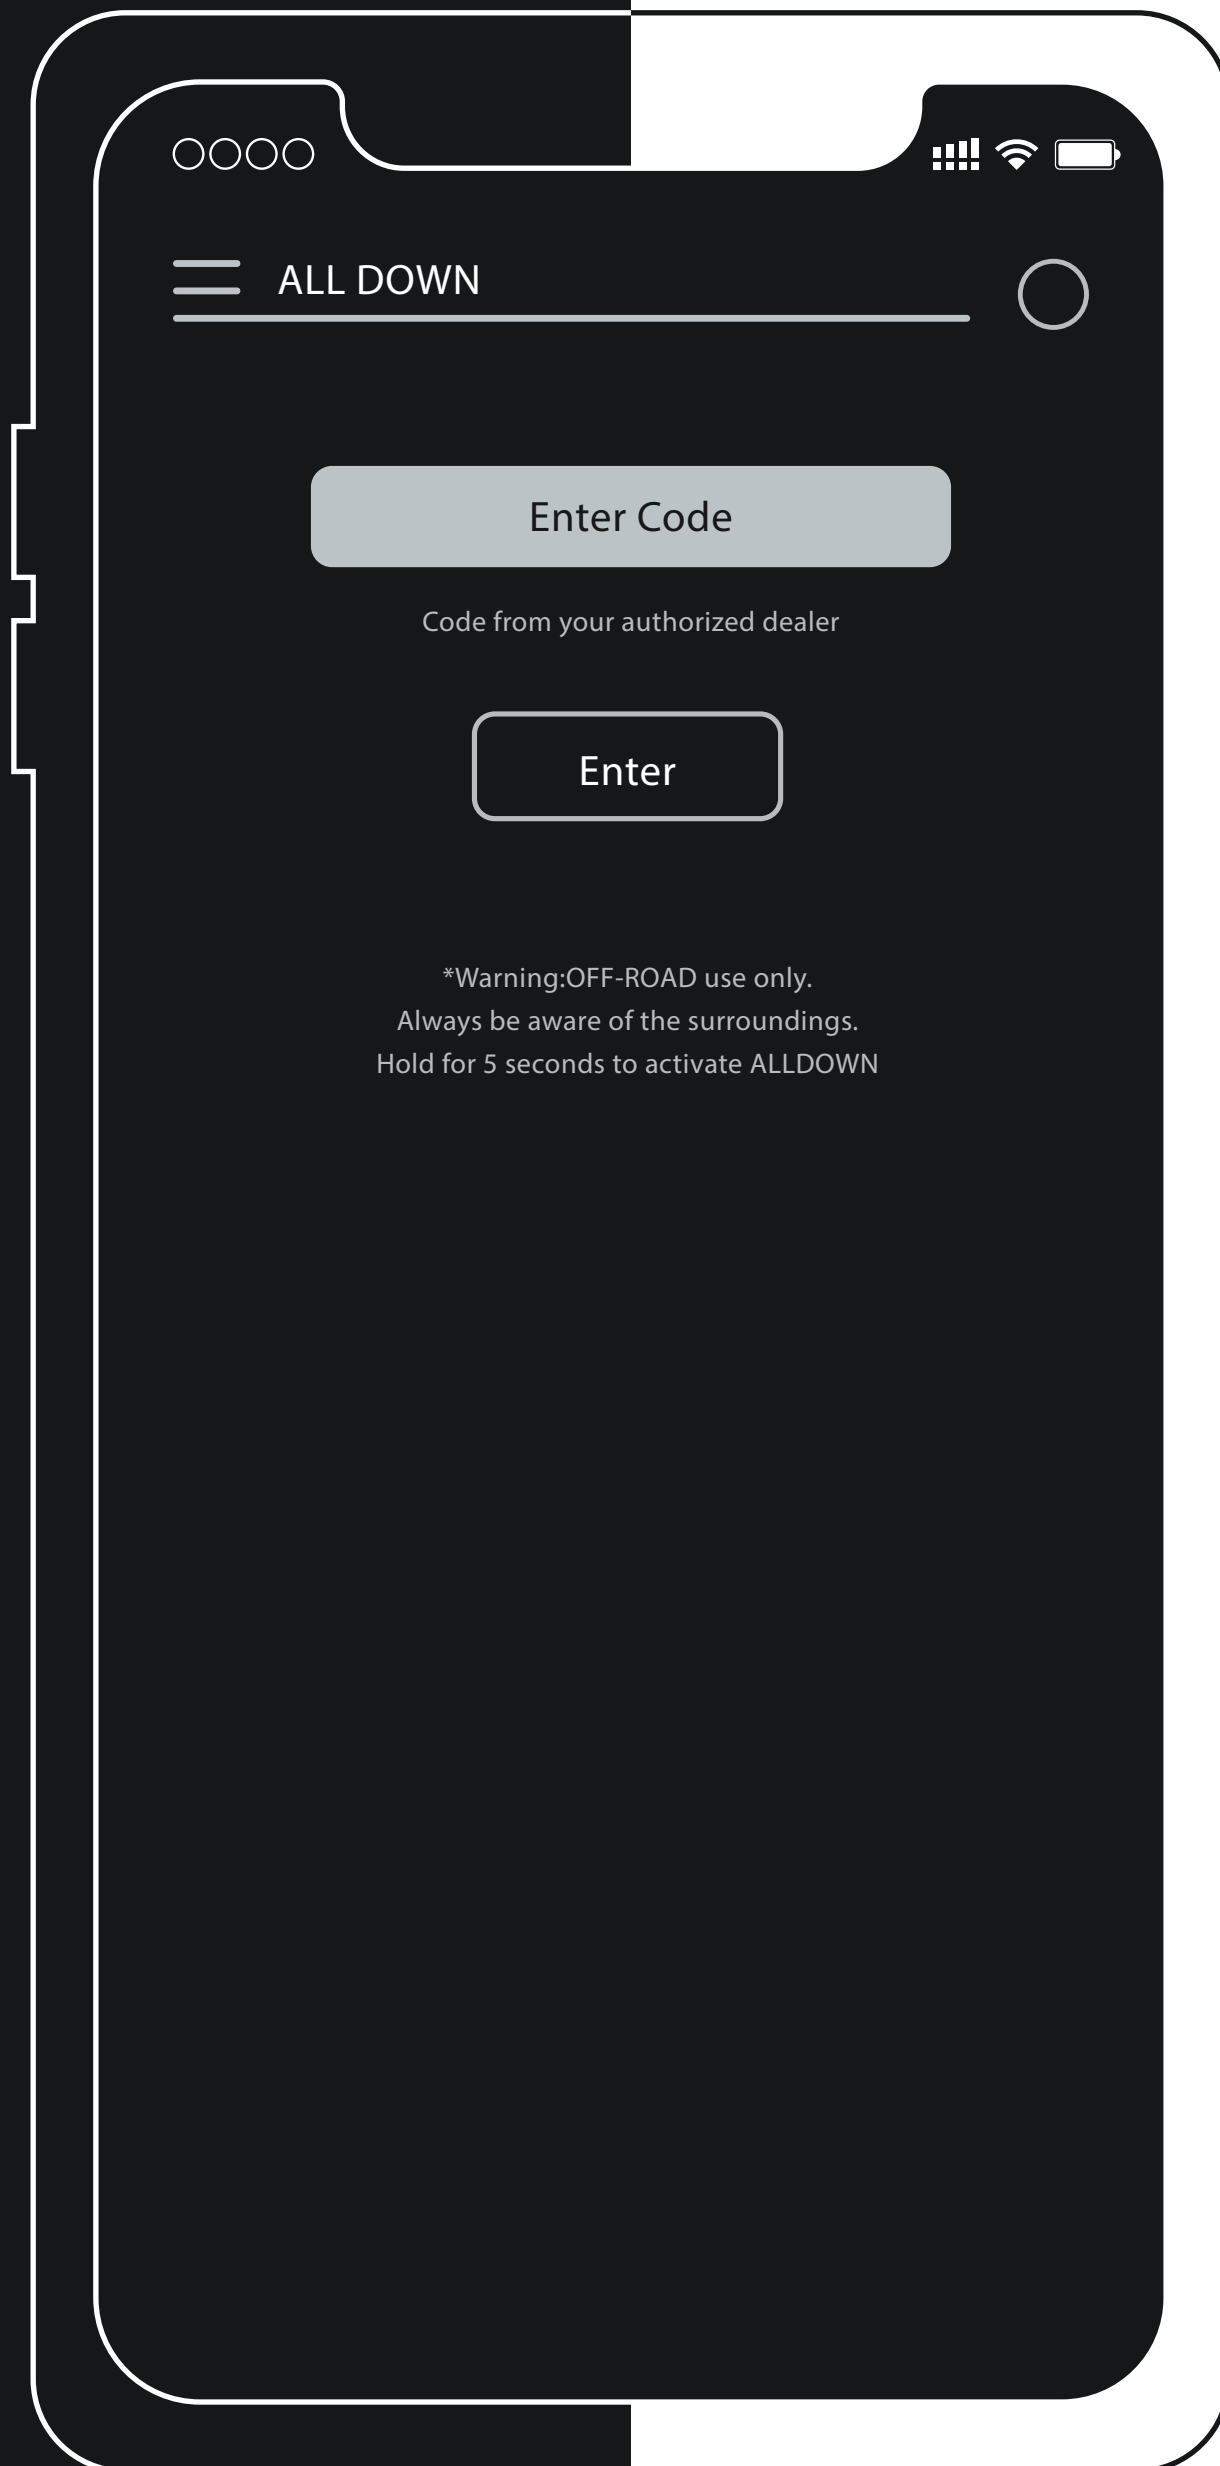

ALL DOWN

Can be activated with your Local Authorized Dealer

Press and Hold for 5 seconds to activate

WARNING:

Be aware of your surrounding,

this function is for OFFROAD USE ONLY

Manual Adjust Damping

OnAir
Powered by MasoAir™



Front
Suspension



Rear
Suspension


Do not adjust the factory setting
of the air struts. Contact authorized
dealer for any questions.

Control Module

OnAir
Powered by MasoAir™



Vehicle height setting

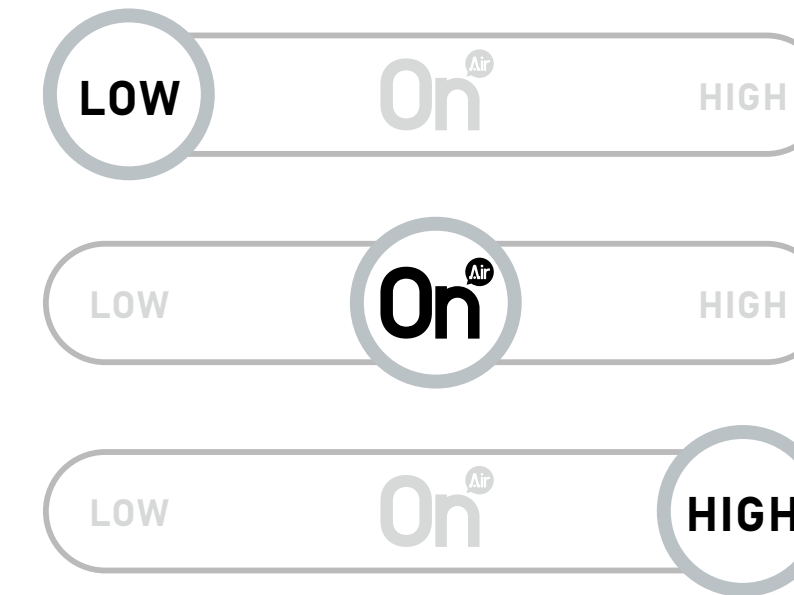

Manual air pump

Quick Access:

Hold and press the button for
2 seconds to engage

OnAir

Powered by MasoAir™